

LED High Bay

170

LM/W



IP65




60°




90°




120°

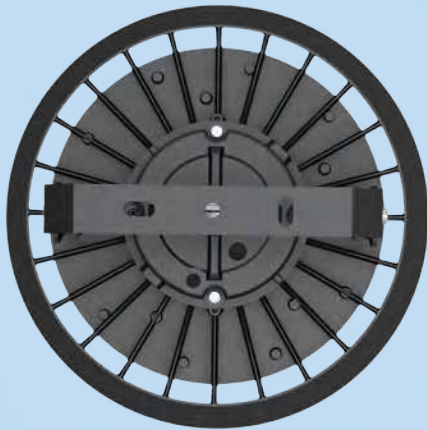

INTERNATIONAL  LIGHTING

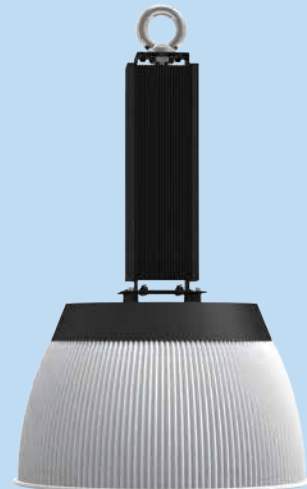

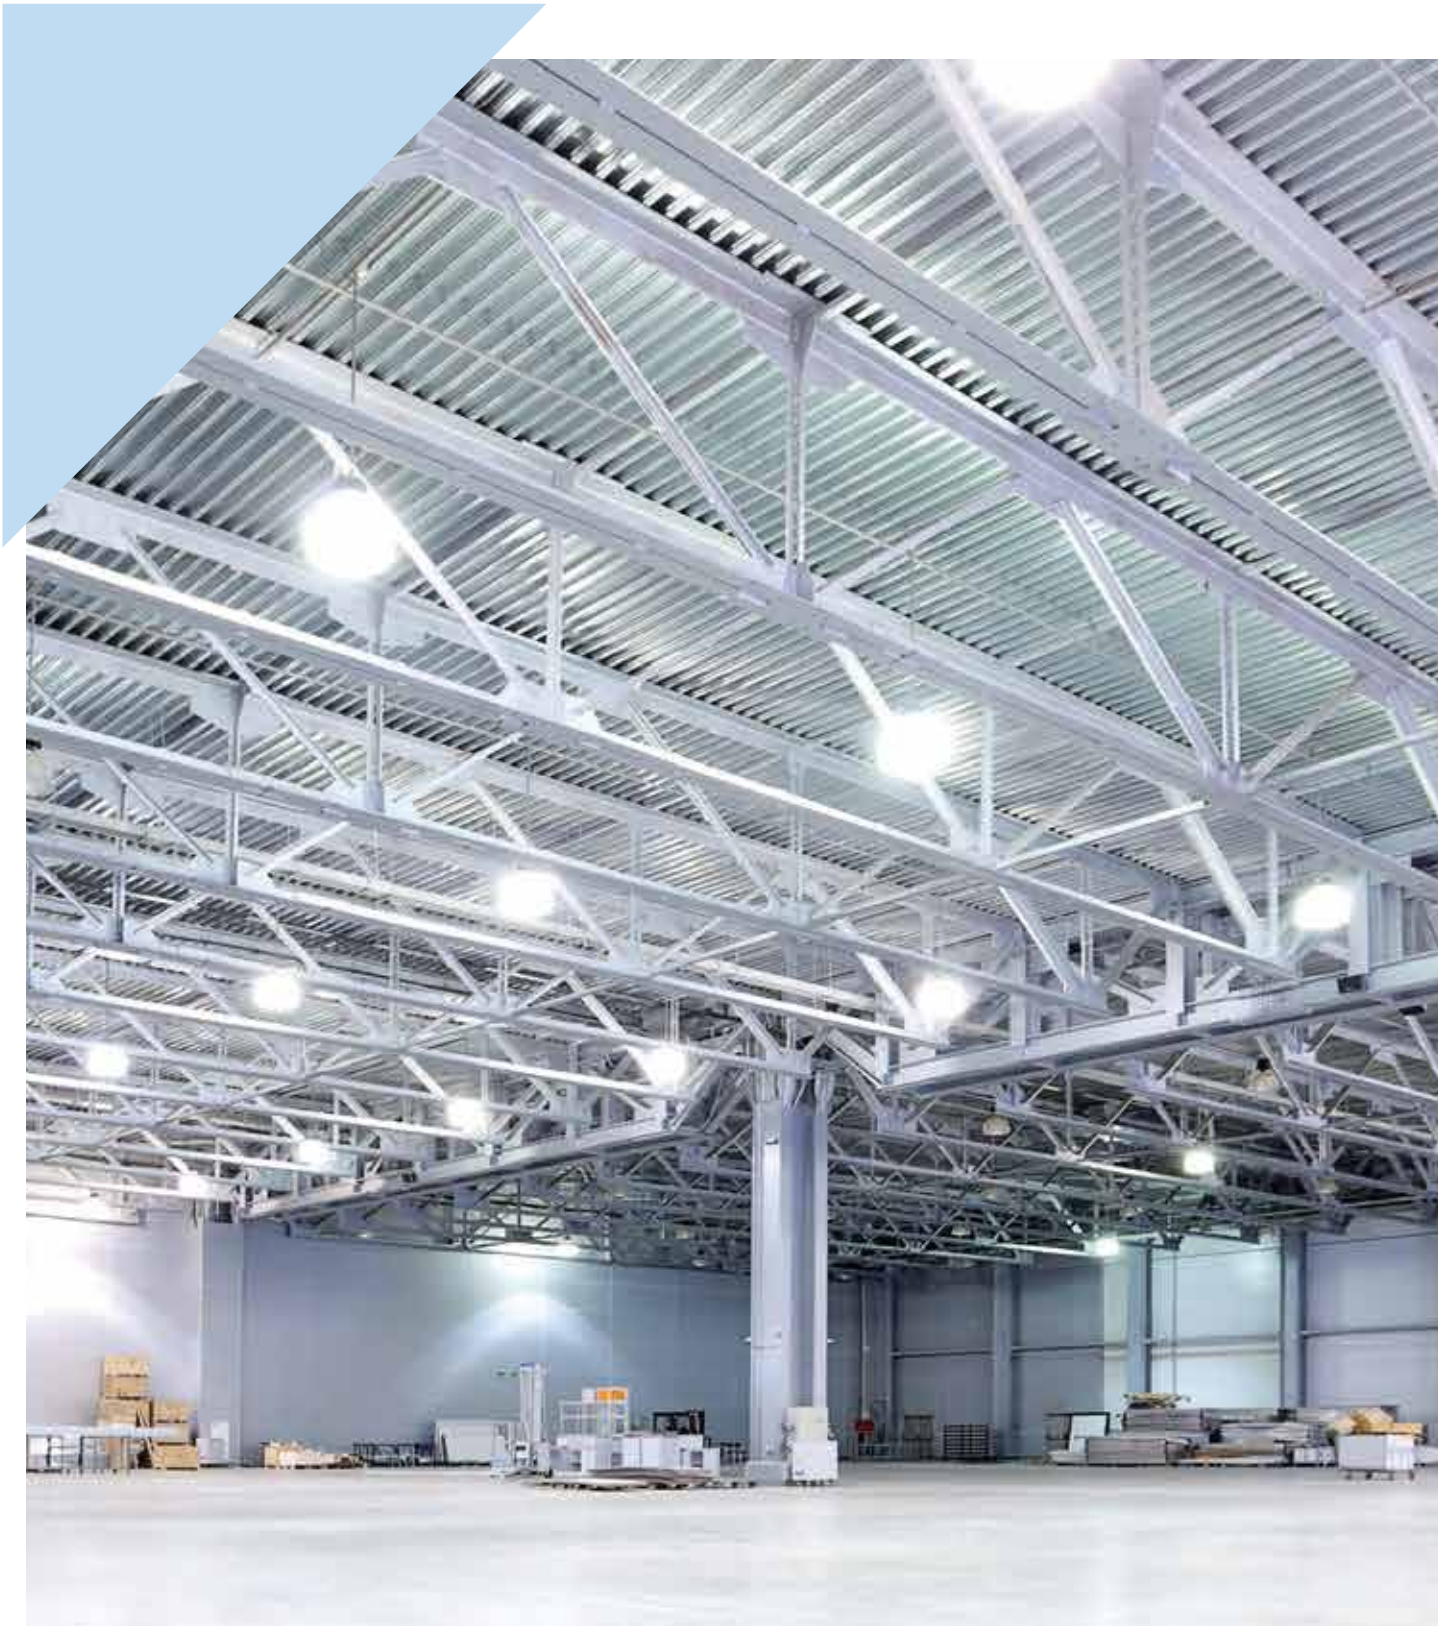

CE CB



Model N. O.	GL-UFO100-J	GL-UFO120-J	GL-UFO150-J	GL-UFO200-J
Wattage	100W	120W	150W	200W
Luminous Efficiency	170LM/W			
Total Lumen	17,000LM	20,400LM	25,500 LM	34,000 LM
Beam Angle	60° /90°/120° PC reflector			
Driver	Meanwell			
PF	> 0.95			
Dimming	0-10V/DALI/PWM			
LED	Lumileds/Epistar 2835			
LED Qty	240pcs	360pcs	360pcs	480pcs
CCT	3000K/4000K/5000K/5700K/6500K			
CRI	>70(80Ra optional)			
Input Voltage	AC90-305V 50/60Hz			
IP Rating	IP65			
IK Rating	IK09			
Life span	>50,000hours			
Carton Size (mm)	L280mm x W280mm x H150mm	L330mm x W330mm x H160mm	L330mm x W330mm x H160mm	L370mm x W370mm x H160mm
QTY./CTN.	1 pcs/CTN	1 pcs/CTN	1 pcs/CTN	1 pcs/CTN
Net Weight	1.9Kg	2.9Kg	2.9Kg	3.0Kg
Gross Weight	2.7Kg	3.7Kg	3.7Kg	3.8Kg
Certificate	CE,CB,SAA,C-tick,ROHS			

* Other specifications shall be confirmed with the sales representative.

Features:

- Patented design
- System efficiency 170 LM/W (150 LM/W for option)
- Meanwell
- Lumileds/Epistar 2835 SMD LED , CRI > 70 (80Ra optional)
- ADC12 aluminum die casting housing , perfect heat dissipation
- Available with 60°/ 90°/120° beam angle
- 3000K / 4000K / 5000K / 5700K / 6500K CCT
- Long life span , L70 > 50,000 Hours

Distribution Curve:



60°




90°




120°


Technical Drawing :

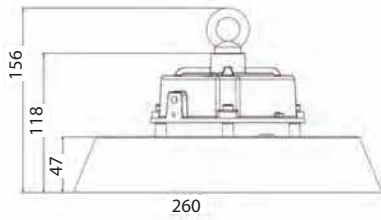


100W High Bay

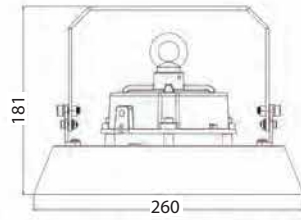


100W High Bay With Bracket

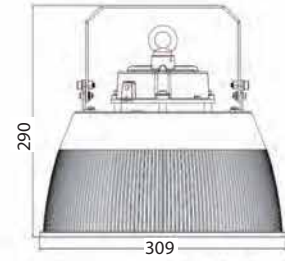


100W High Bay With PC Reflector

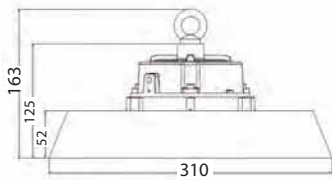


120W / 150W High Bay

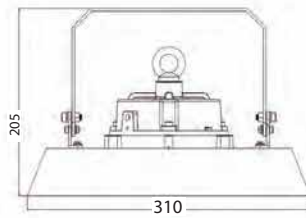


120W / 150W High Bay With Bracket

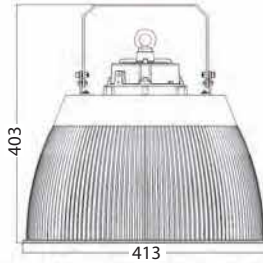


120W/150W High Bay With PC Reflector

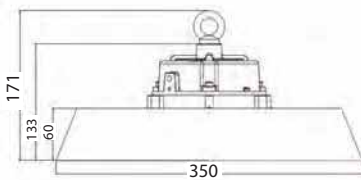

200W High Bay

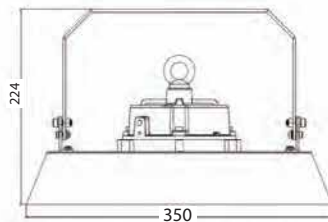

200W High Bay With Bracket

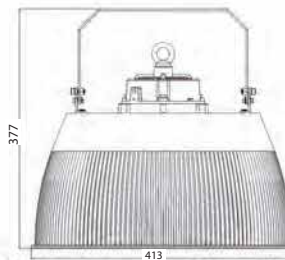

200W High Bay With PC Reflector



International Lighting

+353 (0)21 454 1100

info@internationallighting.ie

www.internationallighting.ie

Unit 1, Doughcloyne Industrial Estate, Wilton, Cork.